



CHARACTERISTIC & SPECIFICATION			REMARKS
PERFORMANCE	AIRTIGHTNESS	5.0 m <sup>3</sup> /h.m <sup>2</sup>	Against 75Pa
	WATERTIGHTNESS	180 Pa	3.4 l/m <sup>2</sup> .min (Water spray)
	STRUCTURAL	850 Pa	Deflection < L/125
	SOUND INSULATION	T-2	-
	OPERABLE FORCE	50N	JIS
	OPEN-CLOSE	8000Cycles	-
PROFILE DEPTH		70mm	
HINGE		2 ~ 3 Hinges	Max. Door weight 80kg
LOCKING SYSTEM		Multi Point Lock	2 Point Locking system
GLAZING		Outer Gasket; Inner Sealant	JIS , BS
GLASS GROOVE		16mm, 18mm , 26mm	for 6, 8, 10, 6+A+6 (mm) THK
PRODUCT SIZE			<p><b>Tophung</b>                      W x H = 1000 x 3000mm                      (Maximum)</p>
			New Product Launching in June



Available for Double Glazing For environmental consideration

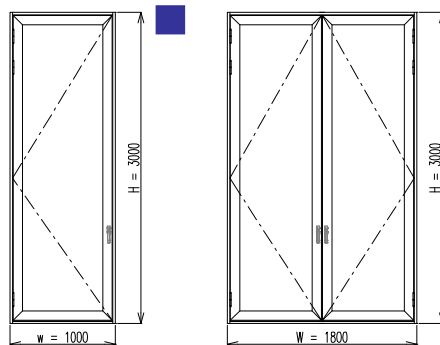

Large size top hung is same image with Large size casement.



Steady handle  
 Proportional handle for multi point lock operation  
 Double handle for Double casement